



COMBINATION SAUNA JCP200


Specification and assembly instructions

SPECIFICATIONS



Model	JCP200
Dimensions	2000x1600x2005 mm
No. of persons	6
Wood	Hemlock, 50 mm
Glass	Black, tempered, 8 mm
Hinges	INOX
Control	Control panel with buttons
Operating time	Do 90 min
Temperature	IR up to 65 °C, finnish up to 90 °C
Ventilation	Yes
Connectivity	USB, Bluetooth, Radio, App
Lighting	LED RGB starry night
Heaters	3150 W, regulation
Stove	6 kW, with thermostat, timer and volcanic stone
Plug in	Single-phase source: Schuko socket 230 V, 50Hz, 16 A fuse Three-phase source: Euro socket 400 V, 50Hz, 3x 16 A fuse
Weight	334 kg

COMPONENTS

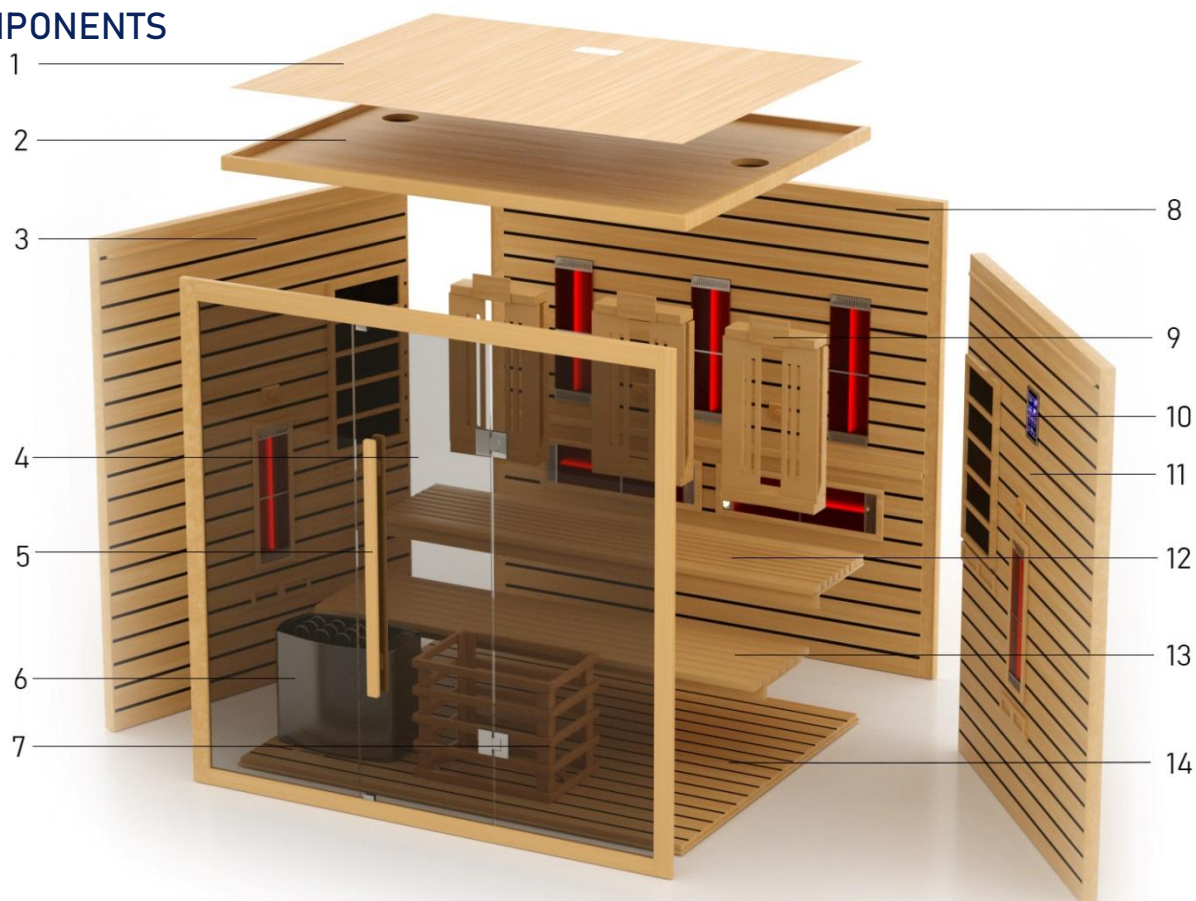

- 1 Cover plate
- 2 Ceiling panel
- 3 Left side
- 4 Front side
- 5 Handles
- 6 Stove
- 7 Stove frame

- 8 Back plate
- 9 Backrests
- 10 Control panel
- 11 Right panel
- 12 Upper bench
- 13 Lower bench
- 14 Bottom


RECOMMENDED TOOLS



Screwdriver



Meter



Screwdriver



Screws



Water scale



Imbus key



Knife



Ladder

ASSEMBLY TIPS

Please remove the transport packaging and check that your sauna has been delivered complete and undamaged before starting assembly. At least three people are required to assemble the sauna.



ASSEMBLY STEPS



1. Back plate



2. Left side



3. Bottom



4. Upper bench



5. Right side



6. Lower bench



7. front page



8. Lean back



9. Ceiling panel





10 Handle




11 Stove and stove frame




12 Cover plate


Installing the outer buckle



①



②



③

Connecting electrical components



1. Connect the power cable under the bench (for saunas with lower and floor heaters).



2. Connect the blue UTP cable from the control panel to the sauna control unit.



3. Connect the power cables between the control unit and the stove.

Installation of hinges, handle and cover



1. Install the hinges



2. Install the handle



3. Install the cover plate



CONNECTION TO THE ELECTRICAL NETWORK

three-phase wiring
from the building

AC400V

5x2,5mm²
stove cable

removing the information
plate enables connection

heaters (infra)

230 V Schuko plug



UTP cable (communication
between the control panel
and the unit)T